



Avalanche™ D.E. FILTERS

Swimming Pool Filter


Filters

Features

- **NEW! Surestitch™ grids with Seam-Lok™ stitching** offer optimum seam strength and wear. Straight, vertical design reduces bridging and provides more uniform flow during filtration.
- **Unique Ring-Lok™ access** allows easy “tool free” entry to grid assembly.
- **Built in “tooth” on Ring-Lok™** allows you to easily disengage lid from tank bottom.
- **Patented wiper plate design** allows D.E. to be regenerated, providing longer filter cycles between cleaning.
- **Patented safety tab lock** assures proper installation and safe operation.
- **2" convenient drain** assures easy draining and winterizing.
- **Modular grid assembly with convenient strap handles** allows easy one piece removal for inspection and cleaning.
- **2" inlet & outlet** for optimum performance. Drain port may be used as alternate inlet allowing flexibility during installation.
- **Convenient, easy-measure DE scoop** included with each filter.
- **Easily convertible from D.E. filter to SherLok Element filter.** See page 56.
- **Anchor kit included to secure tank to base or pad.**



Dimensions

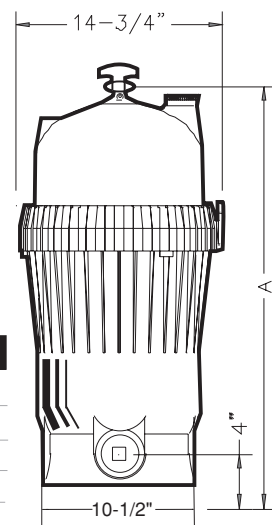

MODEL	A	Clearance Req'd
AV40	26-7/8"	24"
AV60	31-7/8"	30"
AV80	36-1/4"	36"
AV100	41 -3/4"	42"

Performance

Model	GPM	Flow Rate Total Gallons Circulated		D.E. Required
		6 Hrs.	8 Hrs.	
AV40	40	14,400	19,200	3 Scoops
AV60	60	21,600	28,800	4 Scoops
AV80	80	28,800	38,400	5 Scoops
AV100	100	36,000	48,000	6 Scoops

Ordering Information

Model No.	Order No.	Description	Wt.
AV40	9408-7186	40 GPM D.E. Filter	22
AV60	9408-7194	60 GPM D.E. Filter	27
AV80	9408-7202	80 GPM D.E. Filter	32
AV100	9408-7210	100 GPM D.E. Filter	37
ANCH-K	42-3724-17-K	Anchor Kit included with filter	

Note: For parts, see page 101.